


SP33D SP50DX

Barnes SP33D and SP50DX sump pumps feature high performance benefits from a rugged, heavy-duty design. The SP is a robust design, built for long operational life and dependable service.

Product Features for Superior Performance

- Diaphragm switch for dependable activation
- Corrosion-resistant stainless steel shaft and hardware
- Upper and lower oil-lubricated ball bearings for maximum life
- Vortex impeller for optimum life handling up to 1/2" solids
- "Industrial" style motor draws half the amperage of most other sump pumps
- Higher flow rates than most other sump pumps
- Switch Activation On: 13" above sump floor;
Off: 4" above sump floor

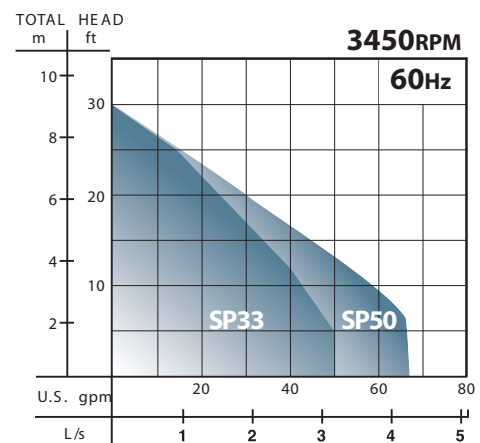

SP33D/SP50DX

Model	SP33D	SP50DX
Motor	1/3hp	1/2hp
RPM	3450	3450
Electrical	120v 1ph	120v 1ph
Cord Length	10'	20'
Construction	cast iron	cast iron
Impeller	cast iron vortex	cast iron vortex
Discharge	1 1/2"	1 1/2"
Solids	1/2"	1/2"
Automatic Operation	Diaphragm switch with piggy-back cord	Diaphragm switch with piggy-back cord

Crane Pumps & Systems

420 Third Street
Piqua, Ohio 45356
(937) 778-8947
Fax (937) 773-7157

www.cranepumps.com

© 2012 Crane Pumps & Systems, Inc.
A Crane Co. Company
Printed in U.S.A.
BPPSP33D-SP50DX - Rev. B (1/12)

